


SEGULA

Your Design Dream is Our Mission-
Together We Make The Impossible Real!

Sun-like spectrum (CRI>98, R9>98)

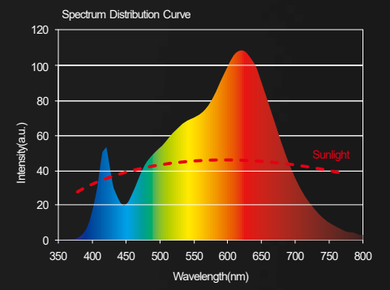

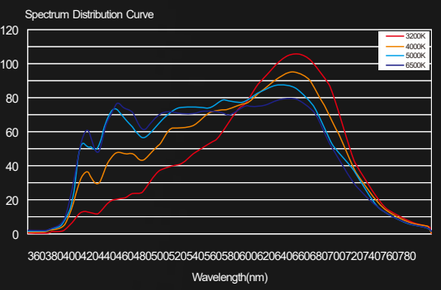

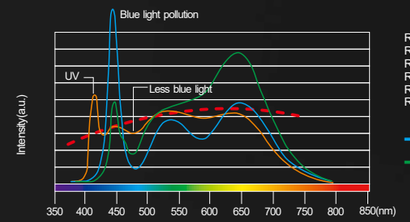


R1=99 R6=97 R11=94
R2=96 R7=95 R12=92
R3=94 R8=96 R13=98
R4=93 R9=93 R14=96
R5=97 R10=91 R15=97
Rf=96.2


Ordinary white light
General full spectrum
Solar-like spectrum
Solar spectrum



Change the Game with Segula Full Spectrum Innovation

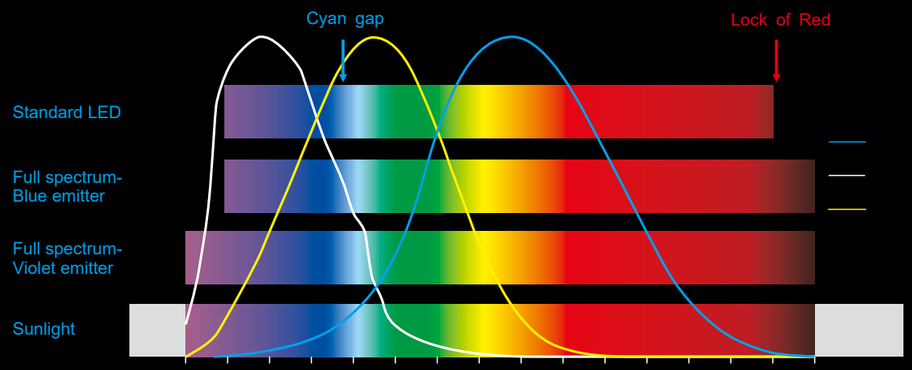

With a spectrum ranging from 1400K to 6000K, our innovative technology closely mimics the beauty of natural sunlight, all while minimizing harmful blue light at 6000K. Light sources with a full spectrum, especially those that mimic sunlight, generally provide more accurate and vibrant color representation.

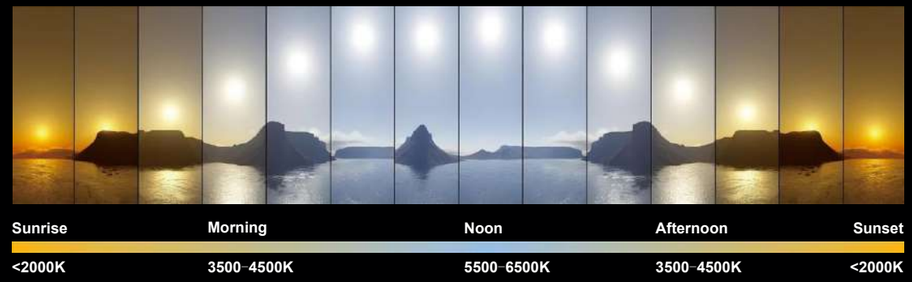

Experince the magic of lighting that enhances your environment, boosts your mood, and elevates your daily activities. Say goodbye to harsh artificial lights and embrace a new era of illumination that brings the warmth and vibrancy of daylight into your home of workspace.

Join us in changing the LED indusrty-illuminate your life with the brilliance of our advanced violet LED light!



☐ White Trim ■ Black Trim



81299
Recessed spotlight
7W/9W
2700K/3000K/4000K/5500K
Ø55mm



81300
Recessed spotlight
9W/12W
2700K/3000K/4000K/5500K
Ø65mm



81301/81302
Recessed spotlight
10W/15W
2700K/3000K/4000K/5500K
Ø75mm



81303
Recessed spotlight
15W/18W
2700K/3000K/4000K/5500K
Ø85mm



81304
Recessed spotlight
18W/20W
2700K/3000K/4000K/5500K
Ø95mm

Model	Dim	Power	Luminous flux	CRI	Beam angle	Input	IP	Cut	Size
81299	●	7W/9W	315Lm/405Lm	Ra>92/98	15°/24°/36°/55°	220V-240V 50/60Hz	20	Ø55mm	Ø62x56mm
81300	●	9W/12W	450Lm/600Lm	Ra>92/98	15°/24°/36°/55°	220V-240V 50/60Hz	20	Ø65mm	Ø71x59mm
81301/81302	●	10W/15W	500Lm/750Lm	Ra>92/98	15°/24°/36°/55°	220V-240V 50/60Hz	20	Ø75mm	Ø82x63mm
81303	●	15W/18W	840Lm/990Lm	Ra>92/98	15°/24°/36°/55°	220V-240V 50/60Hz	20	Ø85mm	Ø93x71mm
81304	●	18W/20W	1080Lm/1200Lm	Ra>92/98	24°/36°/55°	220V-240V 50/60Hz	20	Ø95mm	Ø104x79mm

Finishes: ☐White ■ Black

Fitting: Aluminum Accessories: Honeycomb Louvre, Spread Lens, Diffuser Lens



REES Standard Line



81233
Recessed downlight
5W
2700K/3000K/4000K/5500K
Ø35mm



81234
Recessed downlight
5W
2700K/3000K/4000K/5500K
Ø35mm



81377
Recessed downlight
8W/10W/12W
2700K/3000K/4000K/5500K
Ø75mm



81381
Recessed downlight
8W
1800-6000K
Ø45mm



81235
Recessed downlight
10W
2700K/3000K/4000K/5500K
Ø45mm



81236
Recessed downlight
10W
2700K/3000K/4000K/5500K
Ø45mm



81378
Recessed downlight
8W/10W/12W
2700K/3000K/4000K/5500K
Ø75mm



81382
Recessed downlight
12W
1800-6000K
Ø55mm



81237
Recessed downlight
15W
2700K/3000K/4000K/5500K
Ø55mm



81238
Recessed downlight
15W
2700K/3000K/4000K/5500K
Ø55mm



81379
Recessed downlight
8W/10W/12W
2700K/3000K/4000K/5500K
Ø75mm



81239
Recessed downlight
20W
2700K/3000K/4000K/5500K
Ø75mm



81240
Recessed downlight
20W
2700K/3000K/4000K/5500K
Ø75mm



81380
Recessed downlight
8W/10W/12W
2700K/3000K/4000K/5500K
Ø75mm
IP54

Model	Dim	Power	Luminous flux	CRI	Beam angle	Input	IP	Cut	Size
81233	●	5W	300Lm	Ra>92/98	15°/24°/36°/50°	220V-240V 50/60Hz	20	Ø35mm	Ø42x63mm
81235	●	10W	600Lm	Ra>92/98	15°/24°/36°/50°	220V-240V 50/60Hz	20	Ø45mm	Ø52x86mm
81237	●	15W	900Lm	Ra>92/98	15°/24°/36°/50°	220V-240V 50/60Hz	20	Ø55mm	Ø62x101mm
81239	●	20W	1200Lm	Ra>92/98	15°/24°/36°/50°	220V-240V 50/60Hz	20	Ø75mm	Ø79x128mm
81234	●	5W	300Lm	Ra>92/98	15°/24°/36°/50°	220V-240V 50/60Hz	20	Ø35mm	Ø63x63mm
81236	●	10W	600Lm	Ra>92/98	15°/24°/36°/50°	220V-240V 50/60Hz	20	Ø45mm	Ø71x86mm
81238	●	15W	900Lm	Ra>92/98	15°/24°/36°/50°	220V-240V 50/60Hz	20	Ø55mm	Ø81x101mm
81240	●	20W	1200Lm	Ra>92/98	15°/24°/36°/50°	220V-240V 50/60Hz	20	Ø75mm	Ø100x128mm
81377	●	8W/10W/12W	390Lm/670Lm/890Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	Ø75mm	Ø89x97mm
81378	●	8W/10W/12W	390Lm/670Lm/890Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	Ø75mm	Ø89x97mm
81379	●	8W/10W/12W	390Lm/670Lm/890Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	Ø75mm	Ø89x96mm
81380	●	8W/10W/12W	390Lm/670Lm/890Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	54	Ø75mm	Ø89x96mm
81381	●	8W	120Lm	Ra>92/98	6°	220V-240V 50/60Hz	20	Ø45mm	Ø50x92mm
81382	●	12W	240Lm	Ra>92/98	6°	220V-240V 50/60Hz	20	Ø55mm	Ø60x103mm

Finishes: ☐ Sand White ■ Sand Black
Fitting: Aluminum
Accessories: Honeycomb Louvre, Spread Lens, Diffuser Lens



81187/81188
Recessed spotlight
8W/12W
2700K/3000K/4000K/5500K
Ø75mm



81189/81190
Recessed spotlight
15W/20W
2700K/3000K/4000K/5500K
Ø95mm



81191/81192
Recessed spotlight
15W/20W
2700K/3000K/4000K/5500K
Ø90mm



81193/81194
Recessed spotlight
15W/20W
2700K/3000K/4000K/5500K
Ø120mm



81195
Recessed spotlight
45W/56W
2700K/3000K/4000K/5500K
Ø150mm



81196
Recessed spotlight
25W/40W
2700K/3000K/4000K/5500K
Ø120mm

Model	Dim	Power	Luminous flux	CRI	Beam angle	Input	IP	Cut	Size
81187/81188	●	8W/12W	560Lm/840Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	Ø75mm	Ø92x73mm
81189/81190	●	15W/20W	1050Lm/1400Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	Ø95mm	Ø109x91mm
81191/81192	●	15W/20W	1050Lm/1400Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	Ø90mm	Ø102x104mm
81193/81194	●	15W/20W	1050Lm/1400Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	Ø120mm	Ø136x82mm
81195	●	45W/56W	3150Lm/3920Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	Ø150mm	Ø169x104mm
81196	●	25W/40W	1750Lm/2800Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	Ø120mm	Ø130x108mm

Finishes: □Sand White
Fitting: Aluminum Accessories: Honeycomb Louvre, Spread Lens, Diffuser Lens





81101
Recessed downlight
6W/8W
2700K/3000K/4000K/5500K
Ø55mm



81102
Recessed downlight
6W/8W
2700K/3000K/4000K/5500K
Ø55mm



81103
Recessed downlight
6W/8W
2700K/3000K/4000K/5500K
Ø55mm



81104
Recessed downlight
6W/8W
2700K/3000K/4000K/5500K
Ø55mm

81108/81109
Recessed downlight
10W/15W
2700K/3000K/4000K/5500K
Ø75mm

81110/81111
Recessed downlight
10W/15W
2700K/3000K/4000K/5500K
Ø75mm

81116/81117
Recessed downlight
10W/15W
2700K/3000K/4000K/5500K
Ø75mm

81118/81119
Recessed downlight
10W/15W
2700K/3000K/4000K/5500K
Ø75mm

81124/81125
Recessed downlight
20W/35W
2700K/3000K/4000K/5500K
Ø100mm

81126/81127
Recessed downlight
20W/35W
2700K/3000K/4000K/5500K
Ø100mm

81128/81129
Recessed downlight
20W/35W
2700K/3000K/4000K/5500K
Ø100mm

81130/81131
Recessed downlight
20W/35W
2700K/3000K/4000K/5500K
Ø100mm

REES Hotel Line



81105
Recessed downlight
6W/8W
2700K/3000K/4000K/5500K
Ø55mm

81112/81113
Recessed downlight
10W/15W
2700K/3000K/4000K/5500K
Ø75mm



81106
Recessed downlight
6W/8W
2700K/3000K/4000K/5500K
Ø55mm

81114/81115
Recessed downlight
10W/15W
2700K/3000K/4000K/5500K
Ø75mm



81107
Recessed downlight
6W/8W
2700K/3000K/4000K/5500K
Ø55mm

81120/81121
Recessed downlight
10W/15W
2700K/3000K/4000K/5500K
Ø75mm



81366
Recessed downlight
6W/8W
2700K/3000K/4000K/5500K
Ø55mm

81122/81123
Recessed downlight
10W/15W
2700K/3000K/4000K/5500K
Ø75mm



81132/81133
Recessed downlight
10W/15W
2700K/3000K/4000K/5500K
75x75mm



81134/81135
Recessed downlight
10W/15W
2700K/3000K/4000K/5500K
75x75mm



81367/81368
Recessed downlight
10W/15W
2700K/3000K/4000K/5500K
75x75mm



81369/81370
Recessed downlight
10W/15W
2700K/3000K/4000K/5500K
75x75mm



81136/81137
LED wall washer
10W/15W
2700K/3000K/4000K/5500K
75x75mm




81138/81139
LED wall washer
10W/15W
2700K/3000K/4000K/5500K
75x75mm

Model	Dim	Power	Luminous flux	CRI	Beam angle	Input	IP	Cut	Size
81101	●	6W/8W	420Lm/560Lm	Ra>92/98	15°/24°/40°/60°	220V-240V 50/60Hz	20	Ø55mm	Ø61x80mm
81102	●	6W/8W	420Lm/560Lm	Ra>92/98	15°/24°/40°/60°	220V-240V 50/60Hz	20	Ø55mm	Ø61x80mm
81103	●	6W/8W	420Lm/560Lm	Ra>92/98	15°/24°/40°/60°	220V-240V 50/60Hz	20	Ø55mm	Ø75x90mm
81104	●	6W/8W	420Lm/560Lm	Ra>92/98	15°/24°/40°/60°	220V-240V 50/60Hz	20	Ø55mm	Ø75x90mm
81105	●	6W/8W	420Lm/560Lm	Ra>92/98	15°/24°/40°/60°	220V-240V 50/60Hz	20	Ø55mm	Ø61x80mm
81106	●	6W/8W	420Lm/560Lm	Ra>92/98	15°/24°/40°/60°	220V-240V 50/60Hz	20	Ø55mm	Ø61x80mm
81107	●	6W/8W	420Lm/560Lm	Ra>92/98	15°/24°/40°/60°	220V-240V 50/60Hz	20	Ø55mm	Ø75x90mm
81366	●	6W/8W	420Lm/560Lm	Ra>92/98	15°/24°/40°/60°	220V-240V 50/60Hz	20	Ø55mm	Ø75x90mm
81108/81109	●	10W/15W	860Lm/1300Lm	Ra>92/98	15°/24°/40°/60°	220V-240V 50/60Hz	20	Ø75mm	Ø84x95mm
81110/81111	●	10W/15W	860Lm/1300Lm	Ra>92/98	15°/24°/40°/60°	220V-240V 50/60Hz	20	Ø75mm	Ø84x95mm
81116/81117	●	10W/15W	860Lm/1300Lm	Ra>92/98	15°/24°/40°/60°	220V-240V 50/60Hz	20	Ø75mm	Ø84x95mm
81118/81119	●	10W/15W	860Lm/1300Lm	Ra>92/98	15°/24°/40°/60°	220V-240V 50/60Hz	20	Ø75mm	Ø84x95mm
81112/81113	●	10W/15W	860Lm/1300Lm	Ra>92/98	15°/24°/40°/60°	220V-240V 50/60Hz	20	Ø75mm	Ø100x95mm
81114/81115	●	10W/15W	860Lm/1300Lm	Ra>92/98	15°/24°/40°/60°	220V-240V 50/60Hz	20	Ø75mm	Ø100x95mm
81120/81121	●	10W/15W	860Lm/1300Lm	Ra>92/98	15°/24°/40°/60°	220V-240V 50/60Hz	20	Ø75mm	Ø100x95mm
81122/81123	●	10W/15W	860Lm/1300Lm	Ra>92/98	15°/24°/40°/60°	220V-240V 50/60Hz	20	Ø75mm	Ø100x95mm
81367/81368	●	10W/15W	860Lm/1300Lm	Ra>92/98	15°/24°/40°/60°	220V-240V 50/60Hz	20	75x75mm	83x83x101mm
81369/81370	●	10W/15W	860Lm/1300Lm	Ra>92/98	15°/24°/40°/60°	220V-240V 50/60Hz	20	75x75mm	83x83x98mm
81132/81133	●	10W/15W	860Lm/1300Lm	Ra>92/98	15°/24°/40°/60°	220V-240V 50/60Hz	20	75x75mm	73x73x98mm
81134/81135	●	10W/15W	860Lm/1300Lm	Ra>92/98	15°/24°/40°/60°	220V-240V 50/60Hz	20	75x75mm	73x73x98mm
81136/81137	●	10W/15W	860Lm/1300Lm	Ra>92/98	Asymmetrical	220V-240V 50/60Hz	20	75x75mm	83x83x98mm
81138/81139	●	10W/15W	860Lm/1300Lm	Ra>92/98	Asymmetrical	220V-240V 50/60Hz	20	75x75mm	73x73x98mm
81124/81125	●	20W/25W	1400Lm/2900Lm	Ra>92/98	15°/24°/40°/60°	220V-240V 50/60Hz	20	Ø100mm	Ø112x125mm
81126/81127	●	20W/25W	1400Lm/2900Lm	Ra>92/98	15°/24°/40°/60°	220V-240V 50/60Hz	20	Ø100mm	Ø112x125mm
81128/81129	●	20W/25W	1400Lm/2900Lm	Ra>92/98	15°/24°/40°/60°	220V-240V 50/60Hz	20	Ø100mm	Ø130x125mm
81130/81131	●	20W/25W	1400Lm/2900Lm	Ra>92/98	15°/24°/40°/60°	220V-240V 50/60Hz	20	Ø100mm	Ø130x125mm

Finishes: □Sand White Shading cup color: White Chrome Gun black Champagne gold

Fitting: Aluminum Accessories: Honeycomb Louvre, Spread Lens, Diffuser Lens

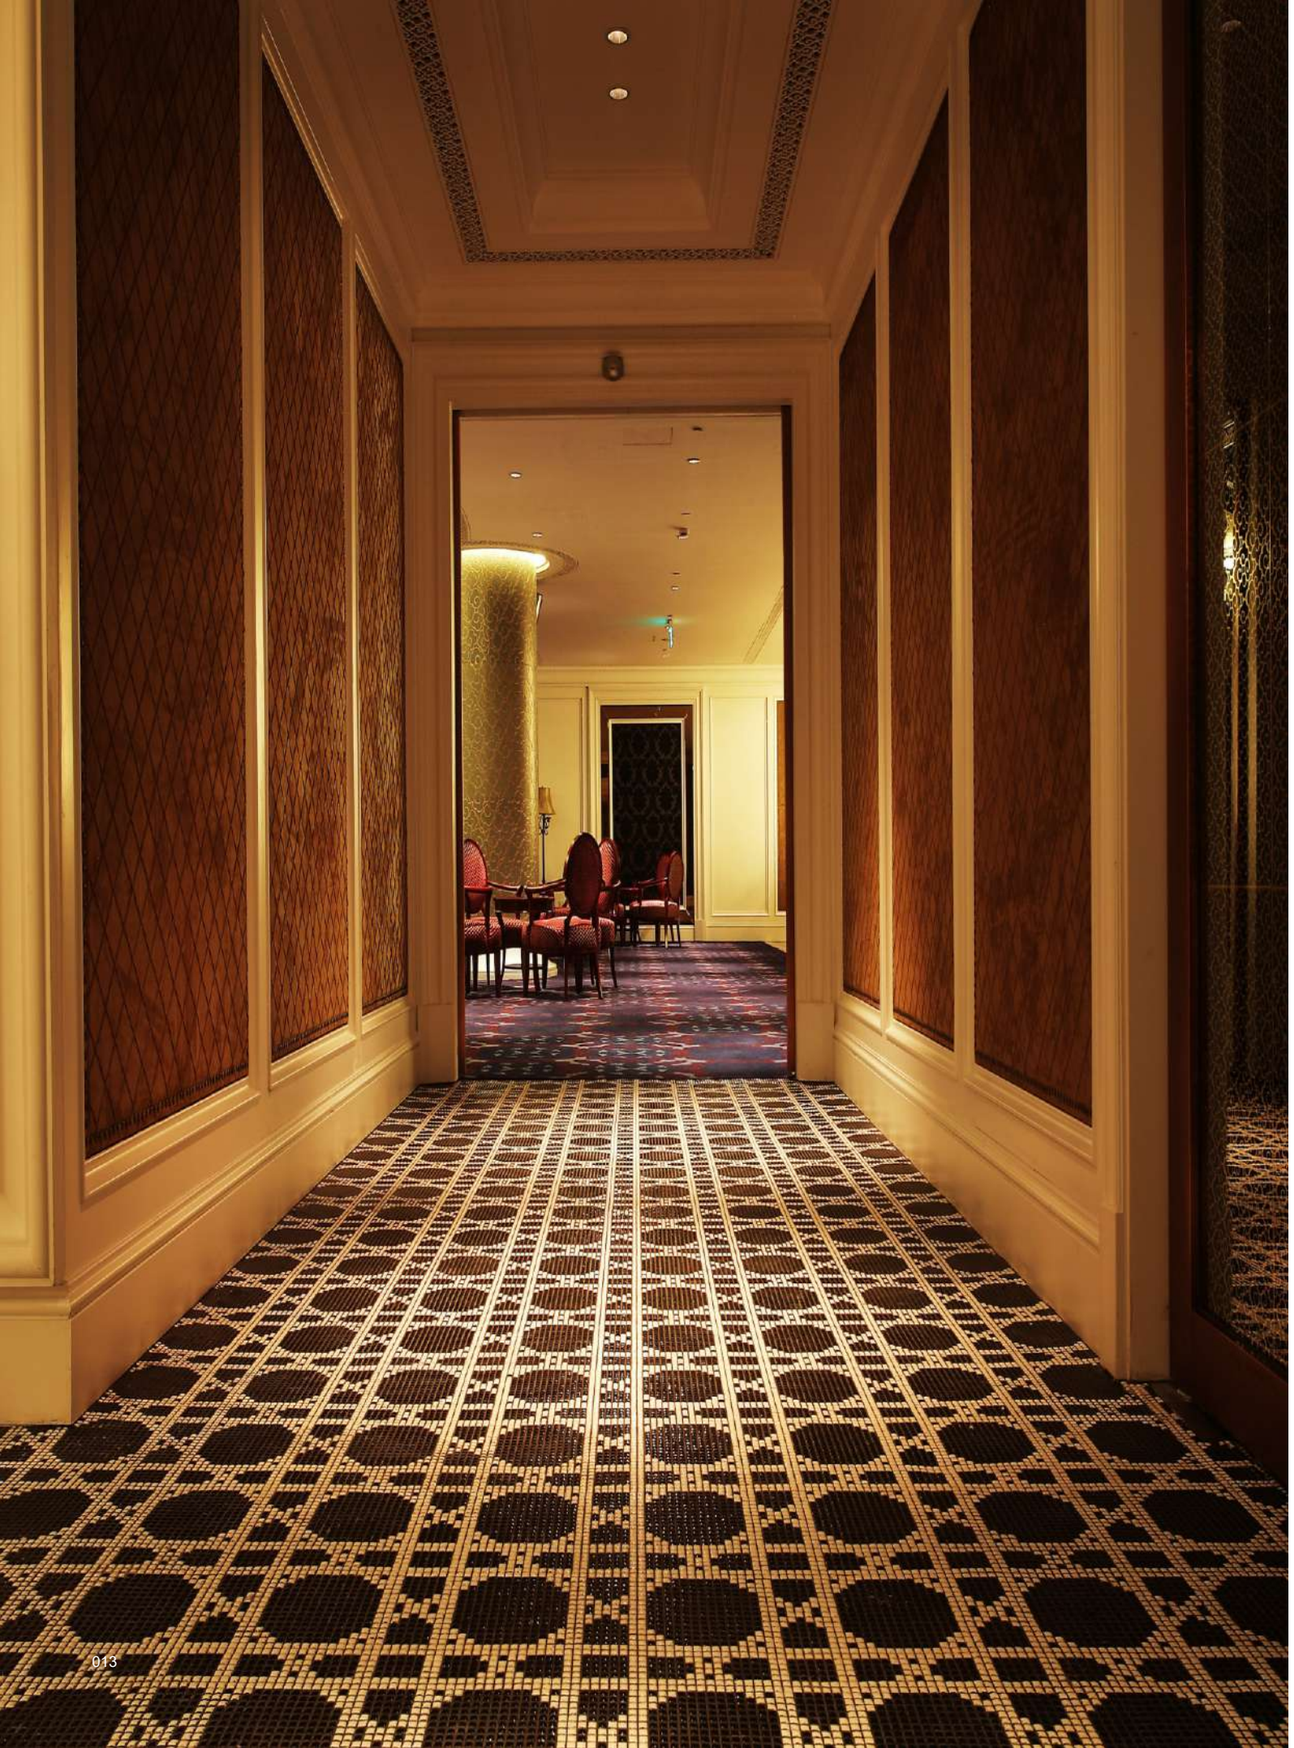

REES Deluxe Line



81371
Recessed downlight
15W
1800-6000K
75x75mm



81372
LED wall washer
15W
1800-6000K
75x75mm



81140/81141
Recessed downlight
6W/12W
1800-6000K
Ø55mm



81148/81149/81150
Recessed downlight
10W/12W/15W
1800-6000K
Ø75mm



81160/81161/81162
Recessed downlight
20W/25W/30W
1800-6000K
Ø100mm



81172/81173/81174
Recessed downlight
35W/40W/50W
1800-6000K
Ø125mm



81144/81155
Recessed downlight
6W/12W
1800-6000K
Ø55mm



81154/81155/81156
Recessed downlight
10W/12W/15W
1800-6000K
Ø75mm



81166/81167/81168
Recessed downlight
20W/25W/30W
1800-6000K
Ø100mm



81175/81176/81177
Recessed downlight
35W/40W/50W
1800-6000K
Ø125mm



81373
Recessed downlight
9W
1800-6000K
Ø55mm



81375
Recessed downlight
15W
1800-6000K
Ø75mm



81374
Recessed downlight
9W
1800-6000K
Ø55mm



81376
Recessed downlight
15W
1800-6000K
Ø75mm

Model	Dim	Power	Luminous flux	CRI	Beam angle	Input	IP	Cut	Size
81371	●	15W	1280Lm	Ra>92/98	15°/25°/35°/54°	220V-240V 50/60Hz	20	75x75mm	83x83x103mm
81372	●	15W	1280Lm	Ra>92/98	Asymmetrical	220V-240V 50/60Hz	20	75x75mm	83x83x103mm
81140/81141	●	6W/12W	600Lm	Ra>92/98	15°/25°/35°/54°	220V-240V 50/60Hz	20	Ø55mm	Ø61x83mm
81148/81149/81150	●	10W/12W/15W	1280Lm	Ra>92/98	15°/25°/35°/54°	220V-240V 50/60Hz	20	Ø75mm	Ø83x102mm
81160/81161/81162	●	20W/25W/30W	2000Lm	Ra>92/98	15°/25°/35°/54°	220V-240V 50/60Hz	20	Ø100mm	Ø112x148mm
81172/81173/81174	●	35W/40W/50W	4460Lm	Ra>92/98	15°/25°/35°/54°	220V-240V 50/60Hz	20	Ø125mm	Ø138x170mm
81144/81145	●	6W/12W	600Lm	Ra>92/98	15°/25°/35°/54°	220V-240V 50/60Hz	20	Ø55mm	Ø80x83mm
81154/81155/81156	●	10W/12W/15W	1280Lm	Ra>92/98	15°/25°/35°/54°	220V-240V 50/60Hz	20	Ø75mm	Ø100x102mm
81166/81167/81168	●	20W/25W/30W	2000Lm	Ra>92/98	15°/25°/35°/54°	220V-240V 50/60Hz	20	Ø100mm	Ø130x142mm
81175/81176/81177	●	35W/40W/50W	4460Lm	Ra>92/98	15°/25°/35°/54°	220V-240V 50/60Hz	20	Ø125mm	Ø123x170mm
81373	●	9W	600Lm	Ra>92/98	15°/25°/35°/54°	220V-240V 50/60Hz	20	Ø55mm	Ø61x83mm
81375	●	15W	1280Lm	Ra>92/98	15°/25°/35°/54°	220V-240V 50/60Hz	20	Ø75mm	Ø83x102mm
81374	●	9W	600Lm	Ra>92/98	15°/25°/35°/54°	220V-240V 50/60Hz	20	Ø55mm	Ø80x83mm
81376	●	15W	1280Lm	Ra>92/98	15°/25°/35°/54°	220V-240V 50/60Hz	20	Ø75mm	Ø100x102mm


Finishes: Sand White Shading cup color: White Chrome Gun black Champagne gold

Fitting: Aluminum Accessories: Honeycomb Louvre, Spread Lens, Diffuser Lens

Remark: The lumen is for the highest wattage, For more detailed information, please contact us directly.



Light Engine

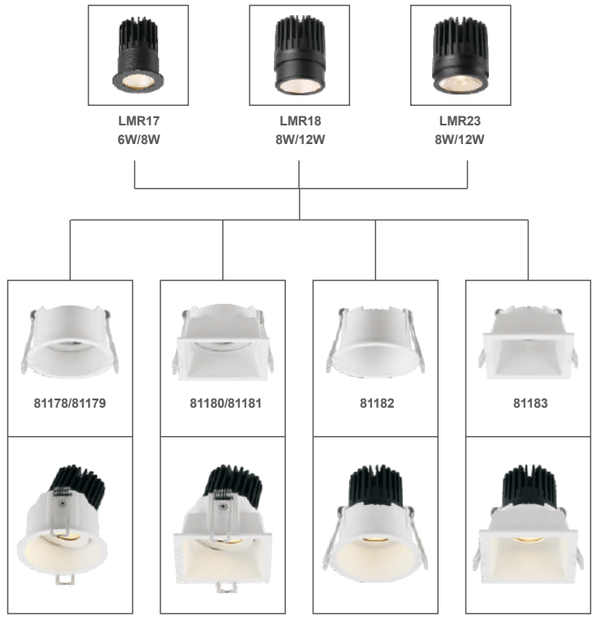



81178/81179
Recessed spotlight
10W/12W
2700K/3000K/4000K/5500K
Ø75mm



81180/81181
Recessed spotlight
10W/12W
2700K/3000K/4000K/5500K
75x75mm



81182
Recessed spotlight
10W/12W
2700K/3000K/4000K/5500K
Ø75mm




81183
Recessed spotlight
10W/12W
2700K/3000K/4000K/5500K
75x75mm

Model	Dim	Power	Luminous flux	CRI	Beam angle	Input	IP	Cut	Size
81178/81179	●	10W/12W	700Lm/840Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	Ø75mm	Ø85x89mm
81180/81181	●	10W/12W	700Lm/840Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	75x75mm	85x85x89mm
81182	●	10W/12W	700Lm/840Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	Ø75mm	Ø85x93mm
81183	●	10W/12W	700Lm/840Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	75x75mm	85x85x93mm

Finishes: ☐ Sand White

Fitting: Aluminum Accessories: Honeycomb Louvre, Spread Lens, Diffuser Lens

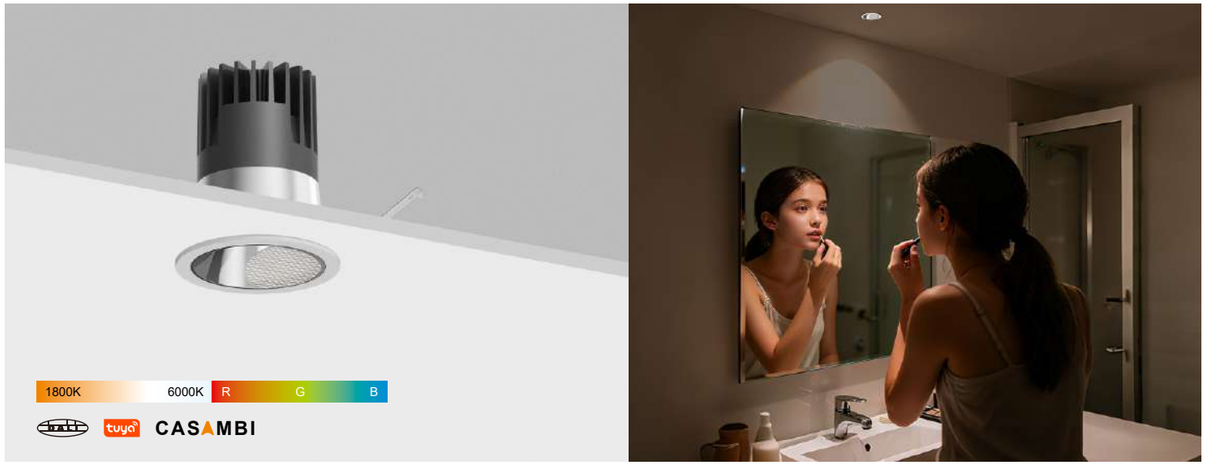





81320
LED wall washer
9W
1800-6000K
Ø55mm



81321
LED wall washer
15W
1800-6000K
Ø75mm



81322
LED wall washer
9W
1800-6000K
Ø55mm



81323
LED wall washer
9W
1800-6000K
Ø55mm



81324
LED wall washer
15W
1800-6000K
Ø75mm



81325
LED wall washer
15W
1800-6000K
Ø75mm



81326
LED wall washer
15W
1800-6000K
Ø95mm



81327
LED wall washer
15W
1800-6000K
Ø95mm

Model	Dim	Power	Luminous flux	CRI	Beam angle	Input	IP	Cut	Size
81320	●	9W	600Lm	Ra>92/98	Asymmetrical	220V-240V 50/60Hz	20	Ø55mm	Ø61x83mm
81321	●	15W	1280Lm	Ra>92/98	Asymmetrical	220V-240V 50/60Hz	20	Ø75mm	Ø83x103mm
81322	●	9W	465Lm	Ra>92/98	Asymmetrical	220V-240V 50/60Hz	20	Ø55mm	Ø61x70mm
81323	●	9W	465Lm	Ra>92/98	Asymmetrical	220V-240V 50/60Hz	20	Ø55mm	Ø75x70mm
81324	●	15W	850Lm	Ra>92/98	Asymmetrical	220V-240V 50/60Hz	20	Ø75mm	Ø84x80mm
81325	●	15W	850Lm	Ra>92/98	Asymmetrical	220V-240V 50/60Hz	20	Ø75mm	Ø100x80mm
81326	●	25W	1400Lm	Ra>92/98	Asymmetrical	220V-240V 50/60Hz	20	Ø95mm	Ø105x105mm
81327	●	25W	1400Lm	Ra>92/98	Asymmetrical	220V-240V 50/60Hz	20	Ø95m	Ø130x105mm

Finishes: □Sand White
Fitting: Aluminum

Shading cup color: White Chrome Gun black Champagne gold
Accessories: Honeycomb Louvre, Spread Lens, Diffuser Lens





Ultrathin design

The maximum thickness of the whole series is only 31mm,
and the installation scope is wide,
especially suitable for the installation of showcase laminates.



Black



White



Gold



Silver



81184
Recessed spotlight
5W
2700K/3000K/4000K/5500K
Ø55mm



81185
Recessed spotlight
8W
2700K/3000K/4000K/5500K
Ø75mm



81186
Recessed spotlight
10W
2700K/3000K/4000K/5500K
Ø90mm


Model	Dim	Power	Luminous flux	CRI	Beam angle	Input	IP	Cut	Size
81184	●	5W	300Lm	Ra>92/98	10°/20°/30°	220V-240V 50/60Hz	20	Ø55mm	Ø68x30mm
81185	●	8W	480Lm	Ra>92/98	10°/20°/30°	220V-240V 50/60Hz	20	Ø75mm	Ø92x36mm
81186	●	10W	600Lm	Ra>92/98	10°/20°/30°	220V-240V 50/60Hz	20	Ø90mm	Ø100x39mm

Finishes: ■Black □White ▨Golden □Silver

Fitting: Aluminum



KAST Line

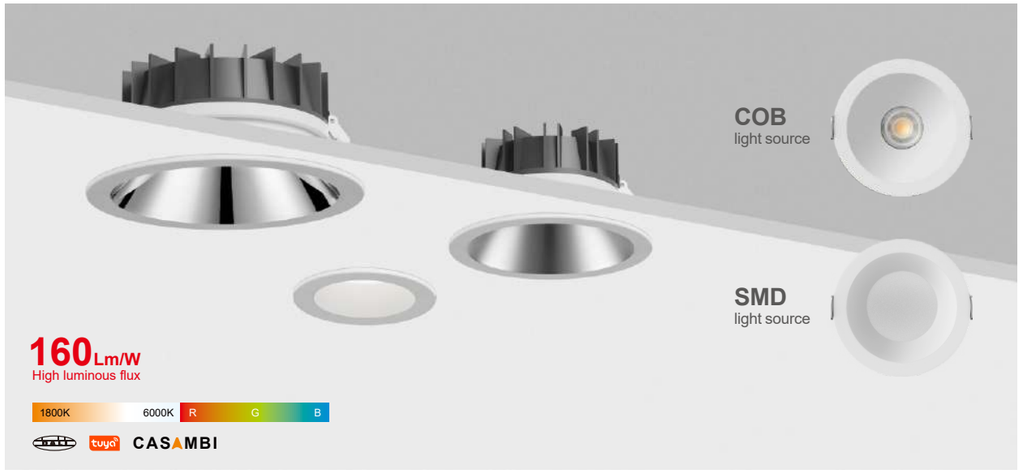



81331
Anti-glare downlight
6W/10W
2700K-6500K
Ø75mm



81332
Anti-glare downlight
12W/15W
2700K-6500K
Ø100mm



81333
Anti-glare downlight
15W/20W
2700K-6500K
Ø120mm



81334
Anti-glare downlight
25W/30W
2700K-6500K
Ø150mm



81335
Anti-glare downlight
35W/40W
2700K-6500K
Ø190mm



81336
Anti-glare downlight
42W/50W
2700K-6500K
Ø260mm

Model	Dim	Power	Luminous flux	CRI	Beam angle	Input	IP	Cut	Size
81331	●	6W/10W	600Lm/1000Lm	Ra>92	80°	220V-240V 50/60Hz	20	Ø75mm	Ø128x65mm
81332	●	12W/15W	1200Lm/1500Lm	Ra>92	80°	220V-240V 50/60Hz	20	Ø100mm	Ø152x77mm
81333	●	15W/20W	1500Lm/2000Lm	Ra>92	80°	220V-240V 50/60Hz	20	Ø120mm	Ø190x88mm
81334	●	25W/30W	2500Lm/3000Lm	Ra>92	80°	220V-240V 50/60Hz	20	Ø150mm	Ø220x90mm
81335	●	35W/40W	3500Lm/4000Lm	Ra>92	80°	220V-240V 50/60Hz	20	Ø190mm	Ø258x111mm
81336	●	42W/50W	4200Lm/5000Lm	Ra>92	80°	220V-240V 50/60Hz	20	Ø260mm	Ø307x111mm

Finishes: ☐Sand White Shading cup color: ☐White ☒Silver ☐Sand silver

Fitting: Aluminum Accessories: Honeycomb Louvre, Spread Lens, Diffuser Lens







81198
Recessed spotlight
3W
1800-6000K
Ø20mm



81199
Recessed spotlight
2x3W
1800-6000K
20x48mm



81201
Recessed spotlight
6W
1800-6000K
Ø30mm



81202
Recessed spotlight
2x6W
1800-6000K
30x70mm



81204
Recessed spotlight
9W
1800-6000K
Ø40mm



81205
Recessed spotlight
2x9W
1800-6000K
40x92mm



81200
Recessed spotlight
3W
1800-6000K
Ø20mm



81203
Recessed spotlight
6W
1800-6000K
Ø30mm



81206
Recessed spotlight
9W
1800-6000K
Ø40mm



81207
Recessed spotlight
3W
1800-6000K
Ø30mm



81208
Recessed spotlight
6W
1800-6000K
Ø40mm




81209
Recessed spotlight
9W
1800-6000K
Ø50mm

Model	Dim	Power	Luminous flux	CRI	Beam angle	Input	IP	Cut	Size
81198	●	3W	130Lm	Ra>92/98	15°/24°/36°/50°	220V-240V 50/60Hz	20	Ø20mm	Ø20x49mm
81199	●	2x3W	265Lm	Ra>92/98	15°/24°/36°/50°	220V-240V 50/60Hz	20	20x48mm	Ø20x49mm
81201	●	6W	390Lm	Ra>92/98	15°/24°/36°/50°	220V-240V 50/60Hz	20	Ø30mm	Ø30x62mm
81202	●	2x6W	770Lm	Ra>92/98	15°/24°/36°/50°	220V-240V 50/60Hz	20	30x70mm	Ø30x62mm
81204	●	9W	600Lm	Ra>92/98	15°/24°/36°/50°	220V-240V 50/60Hz	20	Ø40mm	Ø40x77mm
81205	●	2x9W	1200Lm	Ra>92/98	15°/24°/36°/50°	220V-240V 50/60Hz	20	40x92mm	Ø40x77mm
81200	●	3W	130Lm	Ra>98	15°/24°/36°/50°	220V-240V 50/60Hz	20	Ø20mm	Ø24x66mm
81203	●	6W	390Lm	Ra>92/98	15°/24°/36°/50°	220V-240V 50/60Hz	20	Ø30mm	Ø34x88mm
81206	●	9W	600Lm	Ra>92/98	15°/24°/36°/50°	220V-240V 50/60Hz	20	Ø40mm	Ø44x106mm
81207	●	3W	130Lm	Ra>98	15°/24°/36°/50°	220V-240V 50/60Hz	20	Ø30mm	Ø20x49mm
81208	●	6W	390Lm	Ra>92/98	15°/24°/36°/50°	220V-240V 50/60Hz	20	Ø40mm	Ø30x62mm
81209	●	9W	600Lm	Ra>92/98	15°/24°/36°/50°	220V-240V 50/60Hz	20	Ø50mm	Ø40x77mm

Finishes: □Sand White

Fitting: Aluminum Accessories: Honeycomb Louvre, Spread Lens, Diffuser Lens

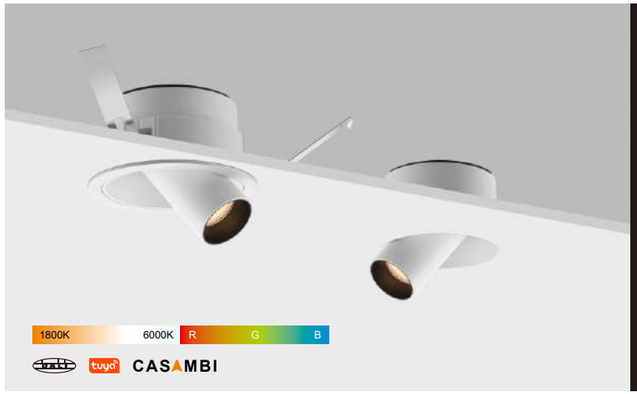





81314
Recessed spotlight
3W
1800-6000K
Ø55mm



81315
Recessed spotlight
6W
1800-6000K
Ø75mm



81316
Recessed spotlight
9W
1800-6000K
Ø100mm



81317
Recessed spotlight
3W
1800-6000K
Ø55mm



81318
Recessed spotlight
6W
1800-6000K
Ø75mm



81319
Recessed spotlight
9W
1800-6000K
Ø100mm

Model	Dim	Power	Luminous flux	CRI	Beam angle	Input	IP	Cut	Size
81314	●	3W	150Lm	Ra>98	15°/24°/36°	220V-240V 50/60Hz	20	Ø55mm	Ø61x44mm
81315	●	6W	300Lm	Ra>92/98	15°/24°/36°/50°	220V-240V 50/60Hz	20	Ø75mm	Ø84x52mm
81316	●	9W	480Lm	Ra>92/98	15°/24°/36°/50°	220V-240V 50/60Hz	20	Ø100mm	Ø113x62mm
81317	●	3W	150Lm	Ra>98	15°/24°/36°	220V-240V 50/60Hz	20	Ø55mm	Ø75x44mm
81318	●	6W	300Lm	Ra>92/98	15°/24°/36°/50°	220V-240V 50/60Hz	20	Ø75mm	Ø100x52mm
81319	●	9W	480Lm	Ra>92/98	15°/24°/36°/50°	220V-240V 50/60Hz	20	Ø100mm	Ø130x62mm

Finishes: □Sand White ■ Sand Black
Fitting: Aluminum Accessories: Honeycomb Louvre, Spread Lens, Diffuser Lens



81281/81282
Track light
15W/20W
2700K/3000K/4000K/5500K



81283/81284
Track light
15W/20W
2700K/3000K/4000K/5500K



81285/81286
Track light
15W/20W
2700K/3000K/4000K/5500K



81287/21288
Track light
15W/20W
2700K/3000K/4000K/5500K



81289/81290
Track light
15W/20W
2700K/3000K/4000K/5500K



81292/81293
Track light
25W/30W
2700K/3000K/4000K/5500K



81280
Track light
7W
2700K/3000K/4000K/5500K



81297/81298
Ceiling light
25W/30W
2700K/3000K/4000K/5500K



81295/81296
Ceiling light
15W/20W
2700K/3000K/4000K/5500K



81328
Track light
8W/10W
2700K/3000K/4000K/5500K



81329
Track light
12W/15W
2700K/3000K/4000K/5500K



81330
Track light
18W/25W
2700K/3000K/4000K/5500K

Model	Dim	Power	Luminous flux	CRI	Beam angle	Input	IP	Size
81281/81282	●	15W/20W	1350Lm/1800Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	Ø94x78mm
81283/81284	●	15W/20W	1350Lm/1800Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	Ø94x78mm
81285/81286	●	15W/20W	1350Lm/1800Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	Ø94x78mm
81287/81288	●	15W/20W	1350Lm/1800Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	Ø94x78mm
81289/81290	●	15W/20W	1350Lm/1800Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	Ø56x150mm
81292/81293	●	25W/30W	2250Lm/2700Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	Ø83x140mm
81280	●	7W	810Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	Ø56x90mm
81297/81298	●	25W/30W	2250Lm/2700Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	Ø83x177mm
81295/81296	●	15W/20W	1350Lm/1800Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	Ø56x150mm
81328	●	8/10w	450Lm/480m	Ra>92/98	Asymmetrical	220V-240V 50/60Hz	20	Ø53x113mm
81329	●	12W/15W	780Lm/850Lm	Ra>92/98	Asymmetrical	220V-240V 50/60Hz	20	Ø72x115mm
81330	●	18W/25W	1000Lm/1400Lm	Ra>92/98	Asymmetrical	220V-240V 50/60Hz	20	Ø100x115mm

Finishes: ☐Sand White ■Sand Black

Fitting: Aluminum Accessories: Honeycomb Louvre, Spread Lens, Diffuser Lens

CYCLE Line



81220/81221
Surface mounted downlight
20W/30W
2700K/3000K/4000K/5500K



81222/81223
Surface mounted downlight
15W/20W
2700K/3000K/4000K/5500K



81229/81230
Surface mounted downlight
8W/10W
2700K/3000K/4000K/5500K




81231/81232
Surface mounted downlight
8W/12W
2700K/3000K/4000K/5500K




81226
Surface mounted downlight
8W
2700K/3000K/4000K/5500K



81227/81228
Surface mounted downlight
8W/10W
2700K/3000K/4000K/5500K



81224
Surface mounted downlight
8W/10W
2700K/3000K/4000K/5500K



81225
Surface mounted downlight
2x8W/2x10W
2700K/3000K/4000K/5500K

Model	Dim	Power	Luminous flux	CRI	Beam angle	Input	IP	Size
81220/81221	●	15W/20W	900Lm/1200Lm	Ra>92/98	24°/40°	220V-240V 50/60Hz	20	Ø72x160mm
81222/81223	●	8W/10W	480Lm/600Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	Ø75x100mm
81229/81230	●	8W/12W	480Lm/720Lm	Ra>92/98	Asymmetrical	220V-240V 50/60Hz	20	Ø75x100mm
81231/81232	●	20W/30W	1200Lm/1800Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	Ø140x140mm
81226	●	15W/20W/25W	900Lm/1200Lm/1500Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	80x80x120mm
81227/81228	●	8W/10W	480Lm/600Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	100x100x140mm
81224	●	8W/10W	480Lm/600Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	98x98x90mm
81225	●	2x8W/2x10W	960Lm/1200Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	190x98x90mm

Finishes: ☐ Sand White ■Sand Black
Fitting: Aluminum Accessories: Honeycomb Louvre, Spread Lens, Diffuser Lens





IP65



81210/81211/81212
Waterproof downlight
15W/20W/25W
2700K/3000K/4000K/5500K
Ø95mm



81213/81214/81215
Waterproof downlight
30W/35W/40W
2700K/3000K/4000K/5500K
Ø125mm



81216/81217/81218
Waterproof downlight
40W/50W/60W
2700K/3000K/4000K/5500K
Ø150mm




81219
Waterproof downlight
60W/70W/80W/100W
2700K/3000K/4000K/5500K
Ø210mm

Model	Dim	Power	Luminous flux	CRI	Beam angle	Input	IP	Cut	Size
81210/81211/81212	●	15W/20W/25W	750Lm/1000Lm/1250Lm	Ra>92/98	20°/30°/40°/50°	220V-240V 50/60Hz	65	Ø95mm	Ø105x90mm
81213/81214/81215	●	30W/35W/40W	1500Lm/1750Lm/2000Lm	Ra>92/98	20°/30°/40°/50°	220V-240V 50/60Hz	65	Ø125mm	Ø135x115mm
81216/81217	●	40W/50W	2000Lm/2500Lm	Ra>92/98	20°/30°/40°/50°	220V-240V 50/60Hz	65	Ø150mm	Ø160x140mm
81218	●	60W	3000Lm	Ra>92	20°/30°/40°/50°	220V-240V 50/60Hz	65	Ø150mm	Ø160x140mm
81219	●	60W/70W/80W/100W	3000Lm/3500Lm/4000Lm/5000Lm	Ra>92	20°/30°/40°/50°	220V-240V 50/60Hz	65	Ø210mm	Ø220x175mm

Finishes: □Sand White
Fitting: Aluminum

Shading cup color: □White ▨Chrome ■Gun black
Accessories: Honeycomb Louvre, Spread Lens, Diffuser Lens

COLUM Line

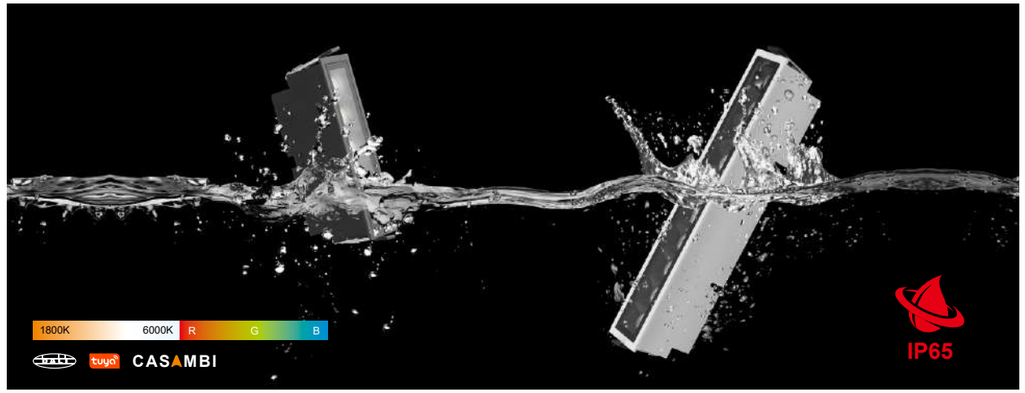



81305
Grille light
6-15W
2700K/3000K/4000K/5500K
148x45mm



81308
Grille light
15-30W
2700K/3000K/4000K/5500K
281x45mm



81311
Grille light
35-45W
2700K/3000K/4000K/5500K
413x45mm



81307
Wall washer
6-15W
2700K/3000K/4000K/5500K
148x45mm



81310
Wall washer
15-30W
2700K/3000K/4000K/5500K
281x45mm



81313
Wall washer
35-45W
2700K/3000K/4000K/5500K
413x45mm



81306
Surface mounted grille light
6-15W
2700K/3000K/4000K/5500K



81309
Surface mounted grille light
15-30W
2700K/3000K/4000K/5500K



81312
Surface mounted grille light
35-45W
2700K/3000K/4000K/5500K

Model	Dim	Power	Luminous flux	CRI	Beam angle	Input	IP	Cut	Size
81305	●	6-15W	1100Lm	Ra>92	15°/24°/36°/50°	220V-240V 50/60Hz	65	148x45mm	154x51x57mm
81308	●	15-30W	2200Lm	Ra>92	15°/24°/36°/50°	220V-240V 50/60Hz	65	281x45mm	287x51x57mm
81311	●	35-45W	3300Lm	Ra>92	15°/24°/36°/50°	220V-240V 50/60Hz	65	413x45mm	419x51x57mm
81307	●	6-15W	1100Lm	Ra>92	Asymmetrical	220V-240V 50/60Hz	65	148x45mm	154x51x57mm
81310	●	15-30W	2200Lm	Ra>92	Asymmetrical	220V-240V 50/60Hz	65	281x45mm	287x51x57mm
81313	●	35-45W	3300Lm	Ra>92	Asymmetrical	220V-240V 50/60Hz	65	413x45mm	419x51x57mm
81306	●	6-15W	1100Lm	Ra>92	15°/24°/36°/50°	220V-240V 50/60Hz	65	/	158x55x97mm
81309	●	15-30W	2200Lm	Ra>92	15°/24°/36°/50°	220V-240V 50/60Hz	65	/	291x55x97mm
81312	●	35-45W	3300Lm	Ra>92	15°/24°/36°/50°	220V-240V 50/60Hz	65	/	423x55x97mm

Finishes: □Sand White ■Sand Black

Fitting: Aluminum

Remark: The lumen is for the highest wattage, For more detailed information, please contact us directly.



COLUM Line



81269
Grille light
6W
2700K/3000K/4000K/5500K
68x28mm



81270
Grille light
12W
2700K/3000K/4000K/5500K
127x28mm



81271
Grille light
18W
2700K/3000K/4000K/5500K
248x28mm



81272
Grille light
6W
2700K/3000K/4000K/5500K
75x35mm



81273
Grille light
12W
2700K/3000K/4000K/5500K
135x35mm



81274
Grille light
18W
2700K/3000K/4000K/5500K
255x35mm



81275
Grille light
6W
2700K/3000K/4000K/5500K
78x45mm



81276
Grille light
12W
2700K/3000K/4000K/5500K
137x45mm



81277
Grille light
18W
2700K/3000K/4000K/5500K
258x45mm



81278
Grille light
8W
1800-6000K
85x35mm



81279
Grille light
12W
1800-6000K
135x35mm

Model	Dim	Power	Luminous flux	CRI	Beam angle	Input	IP	Cut	Size
81269	●	6W	300Lm	Ra>92	24°/50°	220V-240V 50/60Hz	20	68x28mm	70x30x33mm
81270	●	12W	600Lm	Ra>92	24°/50°	220V-240V 50/60Hz	20	127x28mm	133x30x33mm
81271	●	18W	900Lm	Ra>92	24°/50°	220V-240V 50/60Hz	20	248x28mm	255x30x33mm
81272	●	6W	300Lm	Ra>92	24°/50°	220V-240V 50/60Hz	20	75x35mm	92x53x45mm
81273	●	12W	600Lm	Ra>92	24°/50°	220V-240V 50/60Hz	20	135x35mm	154x53x45mm
81274	●	18W	900Lm	Ra>92	24°/50°	220V-240V 50/60Hz	20	255x35mm	275x53x45mm
81275	●	6W	300Lm	Ra>92	24°/50°	220V-240V 50/60Hz	20	78x45mm	83x51x37mm
81276	●	12W	600Lm	Ra>92	24°/50°	220V-240V 50/60Hz	20	137x45mm	143x51x37mm
81277	●	18W	900Lm	Ra>92	24°/50°	220V-240V 50/60Hz	20	258x45mm	264x51x37mm
81278	●	8W	320Lm	Ra>92	24°/50°	220V-240V 50/60Hz	20	85x35mm	97x41x71mm
81279	●	12W	504Lm	Ra>92	24°/50°	220V-240V 50/60Hz	20	135x35mm	141x41x71mm


Finishes: □Sand White ■Sand Black

Fitting: Aluminum





81241
Grille light
7W
2700K/3000K/4000K/5500K
70x70mm



81242
Grille light
2x7W
2700K/3000K/4000K/5500K
130x70mm



81243
Grille light
7W
2700K/3000K/4000K/5500K
70x70mm



81244
Grille light
2x7W
2700K/3000K/4000K/5500K
130x70mm

LEGHOU Line



81245
Grille light
8W/10W
2700K/3000K/4000K/5500K
100x100mm



81246
Grille light
2x8W/2x10W
2700K/3000K/4000K/5500K
195x100mm



81247
Grille light
3x8W/3x10W
2700K/3000K/4000K/5500K
285x100mm



81383
Grille light
5x8W/5x10W
2700K/3000K/4000K/5500K
470x100mm



81248
Grille light
8W/10W
2700K/3000K/4000K/5500K
100x100mm



81249
Grille light
2x8W/2x10W
2700K/3000K/4000K/5500K
195x100mm



81250
Grille light
3x8W/3x10W
2700K/3000K/4000K/5500K
285x100mm



81263/81264
Grille light
25W/30W
2700K/3000K/4000K/5500K
150x150mm



81265/81266
Grille light
2x25W/2x30W
2700K/3000K/4000K/5500K
290x150mm




81267/81268
Grille light
3x25W/3x30W
2700K/3000K/4000K/5500K
430x150mm



81257/81258
Grille light
25W/30W
2700K/3000K/4000K/5500K
150x150mm



81259/81260
Grille light
2x25W/2x30W
2700K/3000K/4000K/5500K
290x150mm




81261/81262
Grille light
3x25W/3x30W
2700K/3000K/4000K/5500K
430x150mm

Model	Dim	Power	Luminous flux	CRI	Beam angle	Input	IP	Cut	Size
81241	●	7W	490Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	70x70mm	75x75x75mm
81242	●	2x7W	980Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	130x70mm	136x75x75mm
81243	●	7W	490Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	70x70mm	65x65x75mm
81244	●	2x7W	980Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	130x70mm	126x65x75mm
81245	●	8W/10W	580Lm/750Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	100x100mm	106x106x43mm
81246	●	2x8W/2x10W	1160Lm/1500Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	195x100mm	199x106x43mm
81247	●	3x8W/3x10W	1740Lm/2250Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	285x100mm	292x106x43mm
81383	●	5x8W/5x10W	2900Lm/3750Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	470x100mm	478x106x43mm
81248	●	8W/10W	580Lm/750Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	100x100mm	96x96x43mm
81249	●	2x8W/2x10W	1160Lm/1500Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	195x100mm	189x96x43mm
81250	●	3x8W/3x10W	1740Lm/2250Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	285x100mm	282x96x43mm
81263/81264	●	25W/30W	1600Lm/1800Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	150x150mm	154x154x112mm
81265/81266	●	2x25W/2x30W	3200Lm/3600Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	290x150mm	295x154x112mm
81267/81268	●	3x25W/3x30W	4800Lm/5400Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	430x150mm	435x154x112mm
81257/81258	●	25W/30W	1600Lm/1800Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	150x150mm	144x144x112mm
81259/81260	●	2x25W/2x30W	3200Lm/3600Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	290x150mm	285x144x112mm
81261/81262	●	3x25W/3x30W	4800Lm/5400Lm	Ra>92/98	15°/24°/40°	220V-240V 50/60Hz	20	430x150mm	425x144x112mm

Finishes: □Sand White ■Sand Black

Fitting: Aluminum Accessories: Honeycomb Louvre, Spread Lens, Diffuser Lens

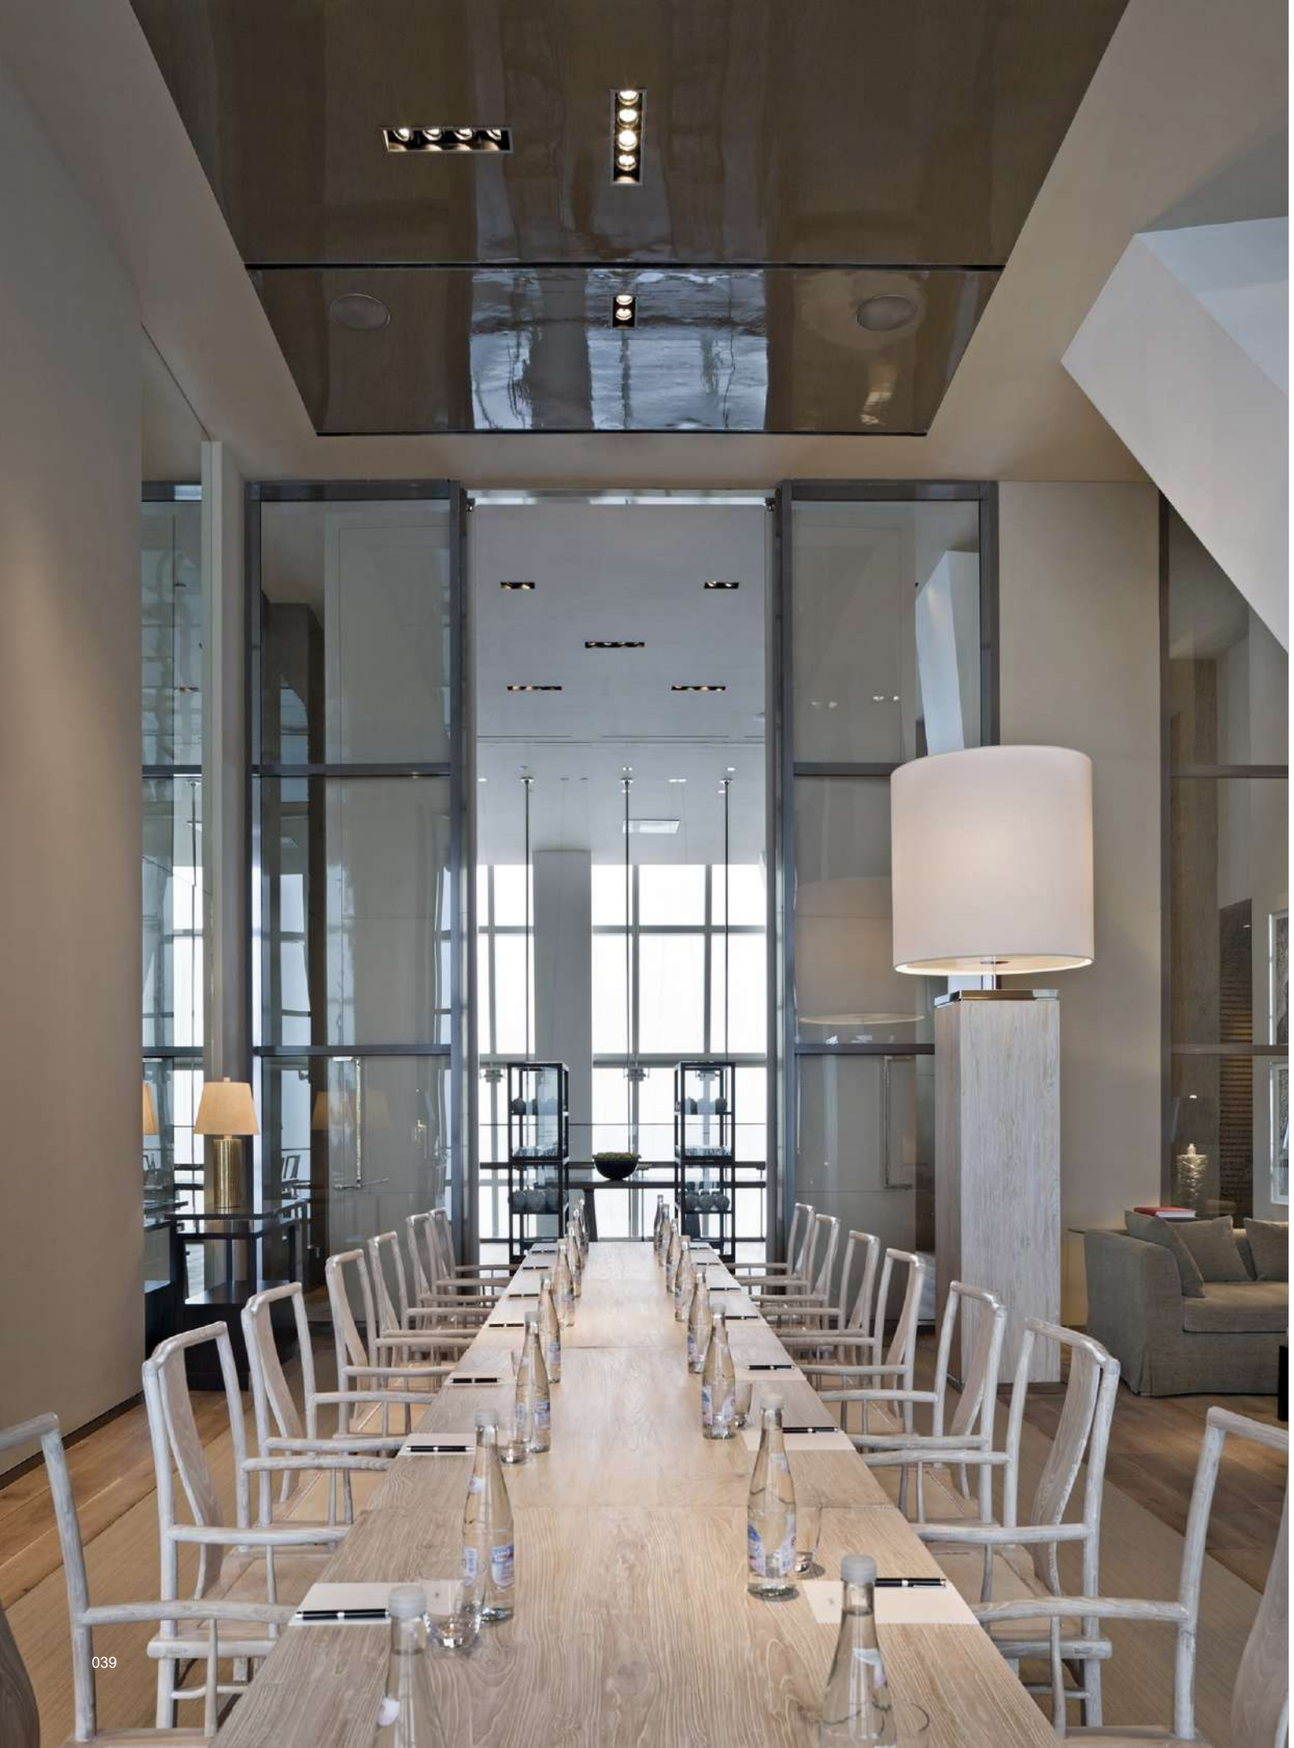



81251
Grille light
Fixture
100x100mm



81252
Grille light
Fixture
195x100mm



81253
Grille light
Fixture
285x100mm



81254
Grille light
Fixture
100x100mm



81255
Grille light
Fixture
195x100mm



81256
Grille light
Fixture
285x100mm

Remarks Additional light source and electrical appliances are required.
It can match G5.3 and GU10 lamp holders.

SEGULA Gu10



55755 12° 8W 500 lm 2700 K
55755 24° 8W 500 lm 2700 K
55755 36° 8W 500 lm 2700 K
LED Reflector
clear



55758 36° 8W 500 lm 2000 - 2800 K
LED Reflector
clear



55772 10° 6W 520 lm 2700 K
55773 24° 6W 520 lm 2700 K
LED Reflector
clear



55774 36° 6W 520 lm 2700 K
55775 60° 6W 520 lm 2700 K
LED Reflector
clear

Model	Cut	Size	Light source	Light source/Appliance
81251	100x100mm	106x106x99.5mm	1PCS	G5.3/GU10
81252	195x100mm	199x106x99.5mm	2PCS	G5.3/GU10
81253	285x100mm	292x106x99.5mm	3PCS	G5.3/GU10
81254	100x100mm	96x96x99.5mm	2PCS	G5.3/GU10
81255	195x100mm	189x96x99.5mm	2PCS	G5.3/GU10
81256	285x100mm	282x96x99.5mm	3PCS	G5.3/GU10

Finishes: ☐Sand White ■Sand Black
Fitting: Aluminum Accessories: Honeycomb Louvre, Spread Lens, Diffuser Lens



81337
Wall light
3W
3000K/4000K/5000K


Ellipse


Pin


Slot

81338
Wall light
3W
3000K/4000K/5000K


Round


Trapezoid


Square


Triangle


Ellipse


Rectangle


Ladder


Pixel

81339
Wall light
3W
3000K/4000K/5000K


Round


Square


Slot


Ladder


Rectangle


Pin


Pixel



Ellipse


Trapezoid


Triangle







Dim	Power	CCT	Input	CRI	IP	Size
●	3W	3000K/4000K/5000K	220V-240V 50/60Hz	Ra>92	20	90x90x36mm


Finishes: ■Sand Black □Sand White ▢Brush Alu ▢Brush Gold
Fitting: Aluminum

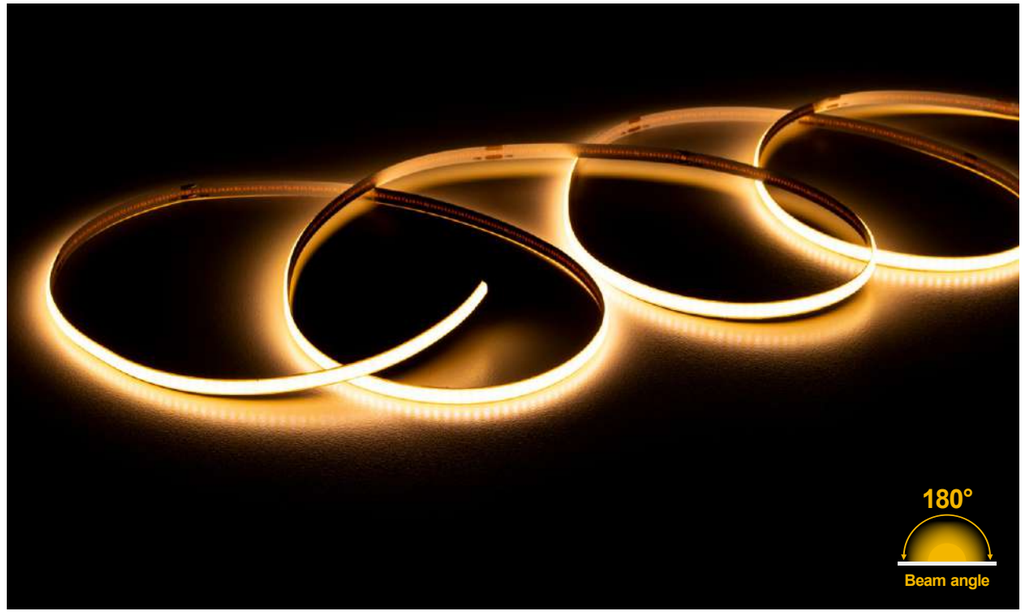


Model	Dim	Power	CCT	Input	CRI	IP	Size
81340	●	10W/m	2700K/3000K/4000K/5500K/R/G/B	24V dc	Ra>95	20	5000mm
81341	●	9.6W/m	2700K/3000K/4000K/5500K/R/G/B	24V dc	Ra>95	20	5000mm
81342	●	4.5W/9W/10W/15W/m	RGB	24V dc	Ra>90	20	5000mm
81343	●	16W/m	RGBW(2700K)	24V dc	Ra>90	20	5000mm
81344	●	16W/18W/20W/m	RGBW(3000K)	24V dc	Ra>90	20	5000mm
81345	●	16W/18W/m	RGBCW(2700-6500K)	24V dc	Ra>90	20	5000mm
81346	●	5W/6W/8W/10W/12W/m	3000K	12/24V dc	Ra>95	20	5000mm
81347	●	6+6W/7+7W/8+8W/m	3000-6000K	12/24V dc	Ra>95	20	5000mm
81348	●	7.5+7.5W/m	2700-6500K	12/24V dc	Ra>95	20	5000mm
81365	●	8W/m	3000K	24V dc	Ra>95	20	5000mm


Aluminum profile (mm)

								
GKLS-047	GKLS-019	GKLS-075	GKLS-007	GKLS-053	GKLS-053A	GKLS-025	GKLS-055	GKLS-011

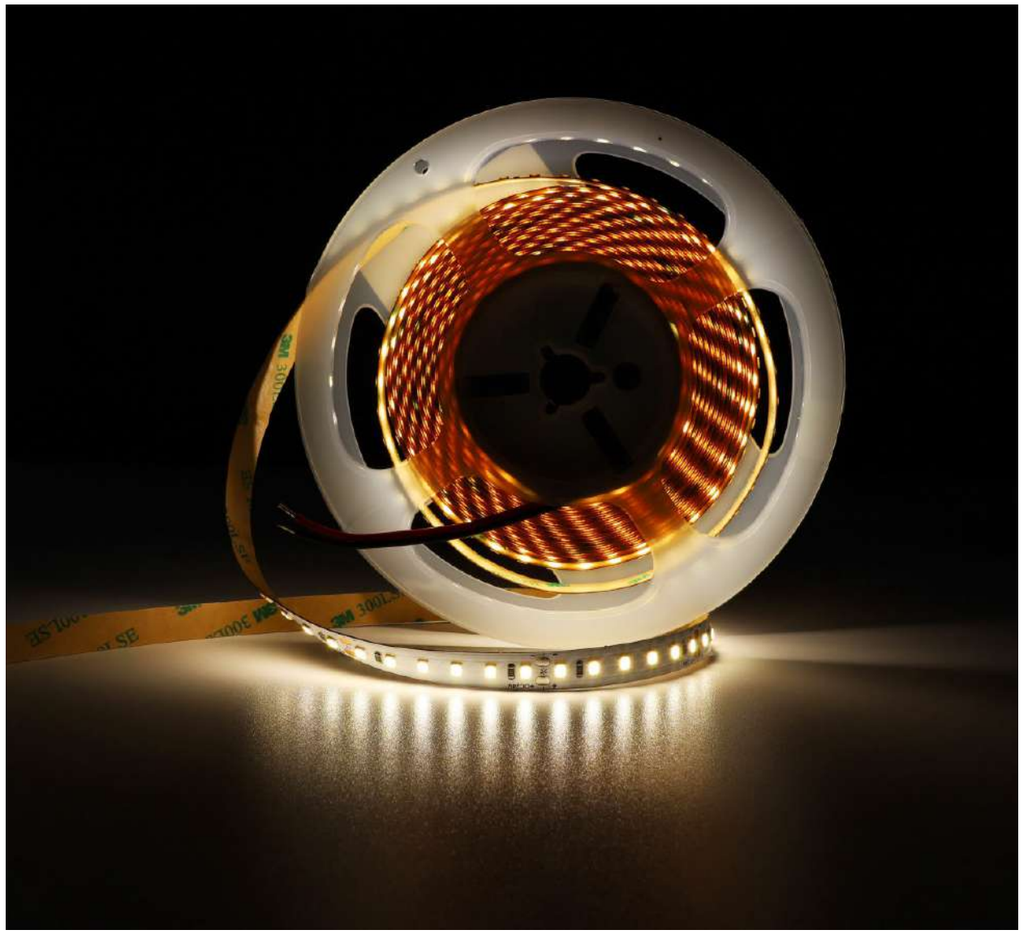


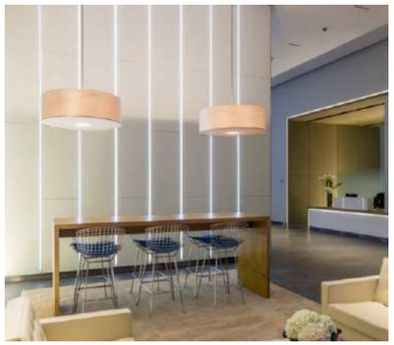







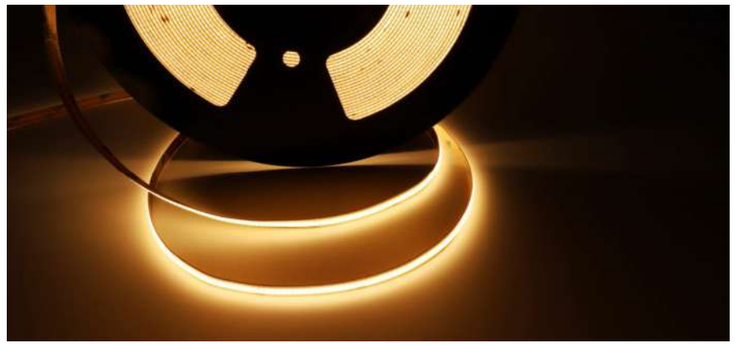



SMD Light strip

Model	Dim	Input	CCT	CRI	Power	Cutting unit	LED Qty	IP Rating	Dimension
81349	●	DC24V	1800-6500K	Ra>95	＜15W/m	Free	168pcs/M	IP20	14x4.5mm/Custom
81350	●	DC24V	RGB/RGBW	Ra>90	＜15W/m	100mm	60pcs/M	IP20	14x4.5mm/Custom

COB Light strip

Model	Dim	Input	CCT	CRI	Power	Cutting unit	LED Qty	IP Rating	Dimension
81351	●	DC24V	1800-6500K	Ra>95	＜15W/m	Free	528pcs/M	IP20	6/8/10/12mm/Custom
81352	●	DC24V	RGB/RGBW	Ra>90	＜15W/m	50mm	840pcs/M	IP20	10/12mm/Custom

















Neon Light strip

Model	Dim	Bend	Input	CCT	CRI	Power	Cutting unit	LED Qty	IP Rating	Dimension
81353	●	Side Bend	DC24V	1800-6500K	Ra>95	＜6W/m	50mm	240pcs/M	IP65	W4xH8mm/Custom
81354	●	Top Bend	DC24V	1800-6500K	Ra>95	＜8W/m	50mm	240pcs/M	IP65	W6xH6mm/Custom
81355	●	Side Bend	DC24V	1800-6500K	Ra>95	＜10W/m	50mm	240pcs/M	IP65	W6xH6mm/Custom
81356/81357	●	Top Bend	DC24V	1800-6500K	Ra>95	＜14.4W/m	50mm	240pcs/M	IP65	W11xH9mm/Custom
81358	●	Top/Side/3D Bend	DC24V	1800-6500K	Ra>95	＜14.4W/m	50mm	240pcs/M	IP65	W10xH10mm/Custom
81359	●	Top/Side/3D Bend	DC24V	1800-6500K	Ra>95	＜14.4W/m	50mm	240pcs/M	IP65	W12xH12mm/Custom
81360	●	Side Bend	DC24V	1800-6500K	Ra>95	＜14.4W/m	50mm	240pcs/M	IP67	W12xH20mm/Custom
81361	●	Top/Side/3D Bend	DC24V	1800-6500K	Ra>95	＜15W/m	50mm	240pcs/M	IP67	W16xH15mm/Custom
81362	●	Top/Side/3D Bend	DC24V	1800-6500K	Ra>95	＜16W/m	50mm	240pcs/M	IP65	W20xH20mm/Custom
81363	●	Top/Side/3D Bend	DC24V	RGBW	Ra>95	＜15W/m	125mm	240pcs/M	IP67	W16xH15mm/Custom
81364	●	Top/Side/3D Bend	DC24V	RGBW	Ra>90	＜16W/m	125mm	240pcs/M	IP67	W20xH20mm/Custom

81101.....12
81102.....12
81103.....12
81104.....12
81105.....12
81106.....12
81107.....12
81108.....12
81109.....12
81110.....12
81111.....12
81112.....12
81113.....12
81114.....12
81115.....12
81116.....12
81117.....12
81118.....12
81119.....12
81120.....12
81121.....12
81122.....12
81123.....12
81124.....12
81125.....12
81126.....12
81127.....12
81128.....12
81129.....12
81130.....12
81131.....12
81132.....12
81133.....12
81134.....12
81135.....12
81136.....12
81137.....12
81138.....12
81139.....12
81140.....14
81141.....14
81144.....14
81145.....14
81148.....14
81149.....14
81150.....14
81154.....14
81155.....14
81156.....14
81160.....14
81161.....14
81162.....14
81166.....14
81167.....14
81168.....14
81172.....14
81173.....14
81174.....14
81175.....14
81176.....14
81177.....14
81178.....16
81179.....16
81180.....16
81181.....16
81182.....16
81183.....16
81184.....20
81185.....20
81186.....20
81187.....10
81188.....10
81189.....10
81190.....10
81191.....10
81192.....10
81193.....10
81194.....10
81195.....10
81196.....10
81198.....24
81199.....24
81200.....24
81201.....24
81202.....24
81203.....24
81204.....24
81205.....24
81206.....24
81207.....24
81208.....24
81209.....24
81210.....32
81211.....32
81212.....32
81213.....32
81214.....32
81215.....32
81216.....32
81217.....32
81218.....32
81219.....32
81220.....30
81221.....30
81222.....30
81223.....30
81224.....30
81225.....30
81226.....30
81227.....30
81228.....30
81229.....30
81230.....30
81231.....30
81232.....30
81233.....8
81234.....8
81235.....8
81236.....8
81237.....8
81238.....8
81239.....8
81240.....8
81241.....38
81242.....38
81243.....38
81244.....38
81245.....38
81246.....38
81247.....38
81248.....38
81249.....38
81250.....38
81251.....40
81252.....40
81253.....40
81254.....40
81255.....40
81256.....40
81257.....38
81258.....38
81259.....38
81260.....38
81261.....38
81262.....38
81263.....38
81264.....38
81265.....38
81266.....38
81267.....38
81268.....38
81269.....36
81270.....36
81271.....36
81272.....36
81273.....36
81274.....36
81275.....36
81276.....36
81277.....36
81278.....36
81279.....36
81280.....28
81281.....28
81282.....28
81283.....28
81284.....28
81285.....28
81286.....28
81287.....28
81288.....28
81289.....28
81290.....28
81292.....28
81293.....28
81295.....28
81296.....28
81297.....28
81298.....28
81299.....6

81300.....6
81301.....6
81302.....6
81303.....6
81304.....6
81305.....34
81306.....34
81307.....34
81308.....34
81309.....34
81310.....34
81311.....34
81312.....34
81313.....34
81314.....26
81315.....26
81316.....26
81317.....26
81318.....26
81319.....26
81320.....18
81321.....18
81322.....18
81323.....18
81324.....18
81325.....18
81326.....18
81327.....18
81328.....28
81329.....28
81330.....28
81331.....22
81332.....22
81333.....22
81334.....22
81335.....22
81336.....22
81337.....42
81338.....42
81339.....42
81340.....44
81341.....44
81342.....44
81343.....44
81344.....44
81345.....44
81346.....44
81347.....44
81348.....44
81349.....45
81350.....45
81351.....46
81352.....46
81353.....48
81354.....48
81355.....48
81356.....48
81357.....48
81358.....48
81359.....48
81360.....48
81361.....48
81362.....48
81363.....48
81365.....44
81366.....12
81367.....12
81368.....12
81369.....12
81370.....12
81371.....14
81372.....14
81373.....14
81374.....14
81375.....14
81376.....14
81377.....8
81378.....8
81379.....8
81380.....8
81381.....8
81382.....8
81383.....38

SEGULA

SEGULA Thailand Co., Ltd

Fisherman Way Garden
5/7 Moo.5 Rawai, Mueang Phuket
83130 Phuket
THAILAND

Phone: +66 82 998 6363
Mail: info@segula.co.th
Web: www.segula.co.th



SEGULA Team

Good service is the basis for every good business.Our aim is to offer our customers exceptional products with outstanding service - that's what our team works for every day. Even after the purchase of our products, we remain at your side. Contact us by phone,fax or e-mail.

FRANK SEGULA	Managing Director	Mobile: + 66 82 998 6363	fs@segula.de
WARA SEGULA	Sales Manager	Mobile: + 66 82 998 6363	ws@segula.de
TIRAPHAT THANAKIATKRAI	Sales Manager	Mobile: + 66 94 794 9254	tirapat@segula.co.th
LAPHATRADA SUPICH	Sales Manager	Mobile: + 66 62 959 6563	laphatrada@segula.co.th
ARISA SITTIYANON	Online Marketing	Mobile: + 66 98 081 9606	arisa@segula.co.th



Thailand
SEGULA (Thailand) Co. Ltd
Fisherman Way Garden
5/7A Moo.5 Rawai, Mueang Phuket
83130 Phuket
THAILAND
Phone: +66-829986363
Mail: info@segula.co.th

SEGULA Socials

Facebook

www.facebook.com/Segula.Phuket.Thailand/

Youtube

www.youtube.com/@segulagmbh8732

Instagram

www.instagram.com/segula_phuket