

# SEGULA


## SUPERB KINGDOM LIMITED

Room7A, 9/F., Block B, Hong Kong Industrial Centre  
489-491 Castle Peak Road, Lai Chi Kok, Kowloon, Hong Kong  
Telephone: (+852) 3954 5598

<b>Lighting Type:</b>	Linear Wall Grazer	<b>Description:</b>	SEGULA LED Linear Wall Grazer
<b>Manufacturer:</b>	SEGULA	<b>Article Code:</b>	TWG100-WV
<b>Location:</b>			

## SEGULA LED Linear Wall

### Grazer

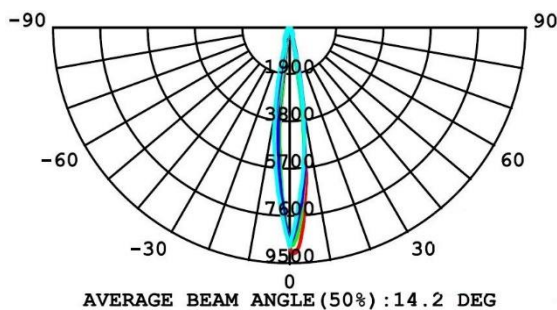

### Product Feature

- \* Precision German Engineering
- \* IP65 Waterproof Design
- \* No Flicker LED-No interference on Smart Phone, CCTV, Live Video and Web Camera
- \* Industrial Grade Aviation Aluminum Ensures Heat Dissipation
- \* Smooth and Uniform Lighting with No Hotspot

### Description

Dimension:	L96.5*W41*H44.7mm
Material:	Aluminum, Tempered glass, Optical Lens
Input:	DC24V
System Power:	6W/Module
Light Source:	CREE LED
Color Temp:	2700K
CRI:	Ra90
Lumen:	>2500Lm/M
IP Rating:	IP65
Control System:	DALI Dimming
Beam Angle:	15X30 Degree
Adjustable:	N/A

### Driver:

Dimension:	L256XW80XH50mm
Input:	AC100-240V 50/60HZ
Output:	DC24V
Output Current:	Max 6.3A
Max Power:	150W
Control Protocol	DALI Dimming
IP Rating:	IP67

**Warranty: 2 Years**

**Application: All Indoor/outdoor place**

## Light Source

### Cree® XLamp® ML-C LEDs



#### PRODUCT DESCRIPTION

The Cree XLamp® ML-C LED brings lighting-class reliability and performance to 1/3-watt LEDs. The XLamp ML-C LED expands Cree's lighting-class leadership to LED bulbs and linear and distributed lighting applications. With XLamp LED lighting-class reliability, a wide viewing angle, uniform light output, and industry-leading chromaticity binning in a 3.5-mm X 3.5-mm package, the XLamp ML-C LED continues Cree's history of segment-focused product innovation in LEDs for lighting applications.

The XLamp ML-C LED brings high performance and a smooth look to a wide range of lighting applications, including linear lighting, fluorescent retrofits and retail-display lighting.

#### FEATURES

- Available in white (2600 K to 8300 K CCT), 80-, 85- and 90-CRI minimum and royal blue
- White LEDs available in both parallel and series
- ANSI-compatible sub-bins
- Maximum drive current: 350 mA for parallel, 175 mA for series, 250 mA for royal blue
- 120° viewing angle, uniform chromaticity profile
- Electrically neutral thermal path
- RoHS and REACH compliant
- UL® recognized component (E349212)



#### CHARACTERISTICS (T<sub>j</sub> = 25 °C)

Characteristics	Unit	Minimum	Typical	Maximum
Thermal resistance, junction to solder point	°C/W		13	
Viewing angle (FWHM) - white	degrees		120	
Viewing angle (FWHM) - royal blue	degrees		125	
Temperature coefficient of voltage - parallel	mV/°C		-3.4	
Temperature coefficient of voltage - series	mV/°C		-6.8	
Temperature coefficient of voltage - royal blue	mV/°C		-3.4	
ESD classification (HBM per Mil-Std-883D) - parallel			Class 2	
ESD withstand voltage (HBM per Mil-Std-883D) - series	V			8000
DC forward current - parallel	mA			350
DC forward current - series	mA			175
DC forward current - royal blue	mA			250
Reverse voltage	V			-5
Forward voltage (@ 100 mA) - parallel	V		3.2	3.4
Forward voltage (@ 50 mA) - series	V		6.4	7.0
Forward voltage (@ 100 mA) - royal blue	V		3.2	3.4
LED junction temperature	°C			150

Color	CCT Range		Minimum Luminous Flux (lm) @ 100 mA		Calculated Min. Luminous Flux (lm) @ 300 mA *	Order Code
	Minimum	Maximum	Group	Flux (lm)		
Warm White	3700 K	4300 K	K2	30.6	63.1	MLCAWT-A1-0000-0000E5
			J3	26.8	55.2	MLCAWT-A1-0000-000XE5
	2800 K	3200 K	K2	30.6	63.1	MLCAWT-A1-0000-0000E7
			J3	26.8	55.2	MLCAWT-A1-0000-000XE7
80-CRI Warm White	3700 K	4300 K	J3	26.8	55.2	MLCAWT-H1-0000-000XE5
	2800 K	3200 K	J2	23.5	48.4	MLCAWT-H1-0000-000WE7
85-CRI Warm White	3700 K	4300 K	J3	26.8	55.2	MLCAWT-P1-0000-000XE5
	2800 K	3200 K	J2	23.5	48.4	MLCAWT-P1-0000-000WE7
90-CRI Warm White	3700 K	4300 K	H0	18.1	37.3	MLCAWT-U1-0000-000VE5
	2800 K	3200 K	J2	23.5	48.4	MLCAWT-U1-0000-000WE7