

SEGULA

SUPERB KINGDOM LIMITED

Room7A, 9/F, Block B, Hong Kong Industrial Centre
489-491 Castle Peak Road, Lai Chi Kok, Kowloon, Hong Kong
Telephone: (+852) 3954 5598

Lighting Type:	Bulb	Lamp:	LED Candle Bulb Clear
Manufacturer:	SEGULA	Catalog No:	50313L
Location:			

LED Candle Bulb Clear



Product Feature

- * Precision German Engineering
- * Segula Constant Current Algorithm
- * 1%-100% Smooth Dimming
- * No Shadow, No Flickering
- * 100% Sapphire Substrate
- * High Lumen Efficiency
- * Excellent Heat Dissipation, Low Working Temperature

Description

Dimension: $\phi 35 \times 98 \text{mm}$

Input Voltage: AC220-240V 50-60Hz

Color Temp: 2600K

CRI: 90 Ra

Power Factor: >95%

Finishing: Clear

Optional: Dimmable

MacAdam: 3 Step

Warranty

Module: 2 Years

Item No	Socket	Energy Used(W)	Lumen	Color Temp	CRI	Beam Angle	Dimmable	Energy Class
50313L	E14	4W	300lm	2600K	90 Ra	360°	Yes	A+

SEGULA**SUPERB KINGDOM LIMITED**

Room7A, 9/F., Block B, Hong Kong Industrial Centre
489-491 Castle Peak Road, Lai Chi Kok, Kowloon, Hong Kong
Telephone: (+852) 3954 5598

Lighting Type:	Bulb	Lamp:	LED A60 Bulb Frosted
Manufacturer:	SEGULA	Catalog No:	50335
Location:			

LED A60 Bulb Frosted



Product Feature

- * Precision German Engineering
- * Segula Constant Current Algorithm
- * 1%-100% Smooth Dimming
- * No Shadow, No Flickering
- * 100% Sapphire Substrate
- * High Lumen Efficiency
- * Excellent Heat Dissipation, Low Working Temperature

Description

Dimension: $\phi 60\text{mm} \times 106\text{mm}$

Input Voltage: AC220-240V 50-60Hz

Color Temp: 2600K

CRI: 90 Ra

Power Factor: >95%

Finishing: Frosted

MacAdam: 3Step

Warranty

Module: 2 Years

Item No	Socket	Energy Used(W)	Lumen	Color Temp	CRI	Beam Angle	Dimmable	Energy Class
50335	E27	8W	720lm	2600K	90 Ra	360°	Yes	A+



SUPERB KINGDOM LIMITED

Room7A, 9/F., Block B, Hong Kong Industrial Centre
489-491 Castle Peak Road, Lai Chi Kok, Kowloon, Hong Kong
Telephone: (+852) 3954 5598

Lighting Type:	Bulb	Lamp:	LED Pin G9 Clear
Manufacturer:	SEGULA	Catalog No:	50607
Location:			

LED Pin G9 Clear



Product Feature

- * Precision German Engineering
- * Segula Constant Current Algorithm
- * 1%-100% Smooth Dimming
- * No Shadow, No Flickering
- * 100% Sapphire Substrate
- * High Lumen Efficiency
- * Excellent Heat Dissipation, Low Working Temperature

Description

Dimension: $\phi 14 \times 60 \text{mm}$

Input Voltage: AC220-240V 50-60Hz

Color Temp: 2200K

CRI: 90 Ra

Power Factor: >95%

Finishing: Clear

MacAdam: 3 Step

Warranty

Module: 2 Years

Item No	Socket	Energy Used(W)	Lumen	Color Temp	CRI	Beam Angle	Dimmable	Energy Class
50607	G9	1.5W	100lm	2200K	90 Ra	360°	Yes	A+


SEGULA

SUPERB KINGDOM LIMITED

Room7A, 9/F., Block B, Hong Kong Industrial Centre
489-491 Castle Peak Road, Lai Chi Kok, Kowloon, Hong Kong
Telephone: (+852) 3954 5598

Lighting Type:	Tube Bulb	Lamp:	LED T30 Tube Tinted
Manufacturer:	SEGULA	Catalog No:	54072TL-DC24V
Location:			

SEGULA T30 Tube Tinted

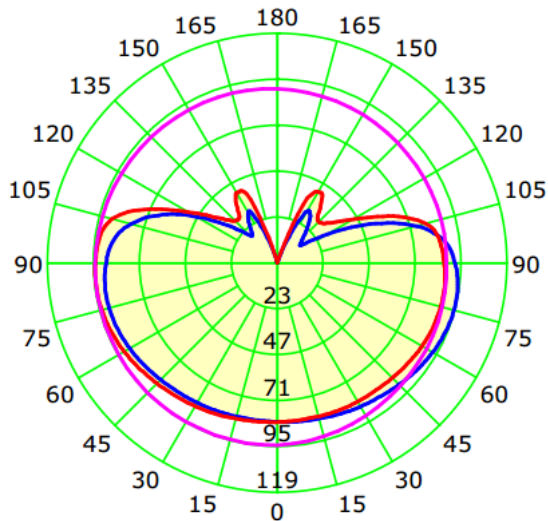

Average Diffuse Angle(50%): 239.7°
Unit: cd

Product Feature

- * Precision German Engineering
- * 100% Sapphire Substrate
- * No Flicker LED-No interference on Smart Phone, CCTV, Live Video and Web Camera
- * High Lumen Efficiency
- * Smooth and Uniform Lighting with No Hotspot

Description

Dimension: $\phi 30 \times 185 \text{mm}$
Material: Glass, Copper Socket
Input: DC 24V
System Power: 6W
Light Source: Filament
Colour Temp: 2500K
CRI: Ra90
Lumen: 400Lm
IP Rating: IP20
Control System: DALI Dimming
MacAdam Ellipse: 3 steps
Beam Angle: 240 Degree
Socket: E27

Warranty

Module: 2 Years

Item No	Socket	Energy Used(W)	Lumen	Color Temp	CRI	Beam Angle	Dimmable	Energy Class
54072TL	E27	6W	400lm	2500K	90 Ra	240°	Yes	A+

Light Source

Golden Aurora® Filaments



PRODUCT DESCRIPTION

360-degree Three-dimensional Light Source
High Light Efficiency, High Mechanical Strength, High Reliability
Integrated High Voltage Drive
SNSI / ERP Color Tolerance Standard
Lead-free Package, in Line with ROHS, LM-80 Certification

FEATURES

- * 100% Sapphire Substrate Packaging
- * Industry-Compatible Size: 38*1.7*1.8mm
- * Available Length: 28mm, 38mm, 60mm
- * Flux Binned at 25°C, chromaticity Binned at 85°C
- * 90CRI Available for all CCTs

PRODUCT SUMMARY

Product	Power Class	Test Temperature	Test Current	Typical Forward Voltage	2200K 90CRI		2700K 90CRI		Maximum Current
					Typical Flux	Typical Efficacy	Typical Flux	Typical Efficacy	
38L24FQ	0.66W	25°C	10mA	66-68V	75Lm	120LPW	85Lm	135LPW	13mA